

ERD620

NEW COMPACT VALVES TESTER

After 45 years, and 150,000 testers installed in more than 5,000 customers worldwide, ATEQ presents its revolutionary valves tester **ERD620**.

New electronic module, new measurement module, new interface, new accessories... All has been made to improve your quality control.

The purpose of the instrument is to generate a pressure ramp and is waiting for an event as a flow appears (ex: valve opening). A ramp down can also detect when valve is closed. The instrument will display the event pressures and compare them to reject levels. As an option the flow event can be replaced by a dry contact event.

Highlights

- LARGE COLOR DISPLAY
- MAXIMUM PERFORMANCE
- MULTIPLE COMMUNICATION



Applications



FLOW CONTROL

Opening valves, closing valves with flow detection...



LEAK DETECTION

Leaking levels with flow detection...



CONTROL

Pressure contact elements...

ERD620

NEW COMPACT VALVES TESTER

Measurement ranges

FLOW MEASUREMENT		
Range l/h	Accuracy	Max. resolution l/h
5	±(2.5%F + 0.005 l/h)	0.0001
30	±(2.5%F + 0.03 l/h)	0.001
80	±(2.5%F + 0.08 l/h)	0.001
150	±(2.5%F + 0.15 l/h)	0.01
500	±(2.5%F + 0.5 l/h)	0.01
1.500	±(2.5%F + 1.5 l/h)	0.1

F=Flow

Main features

- Flow measurement in direct or indirect testing
- Wide flow measurement range
- USA, S.I. and customer units
- Measurement in standard or customised conditions
- Recalculated flow at the nominal pressure
- Measurement element fully integrated into one module
- 128 programs
- Electronic regulator from vacuum to 10 bar
- setting on line (via USB)
- 2 languages (English + other one)
- Data storage on internal memory or USB key

Environment

- ROHS standard

Flexible communication format


- RS232: Printer, modbus RTU
- Slave USB: PC supervision (WinAteq 300)
- Master USB: USB key to transfert (parameters, results, ...)
- Option Fieldbus: Profibus, devicenet, profinet, Ethernet/IP, Modbus RTU

Additional:

Time & date, language & units choice, test customisation & more...

Technical Specifications

Physical	Weight: 8 Kg Dimensions: (WxHxD) 250x150x360 mm
Interface	Graphic color screen with simple and intuitive menu-driven operator controls SMARTKEY: programmable key with user's functions
External electrical supply	24 VDC/2A or 100-240 VAC/50W
Air supply	Clean and dry air required Air quality standard to be applied (ISO 8573-1)
Temperature	Operating: +5°C to +45°C (+41 °F to 113 °F) Storage: 0°C to +60°C (32 °F to 140 °F)

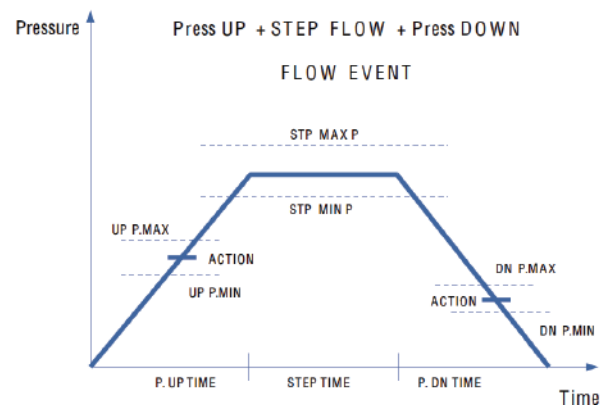

Option

- 9 inputs / 5 local outputs compatible with 5 series instruments
- 6 inputs/ 6 outputs 24 V programmable for external automation
- External capillary: Close to the test part
- 2 pneumatic outputs for control of sealing connectors
- Memory card for archiving results (400 000)

Accessories

- Simple remote control TLC 60 connexion I/O
 - Advanced remote control TLC 600 connexion master USB
 - USB key for parameters access
 - Y valve
 - WinAteq 300 software
 - Leak calibrator
 - Master jets
 - Vacuum pump
 - Sealing connectors
- Please refer to ATEQ accessories list



TLC 600
Remote control



TLC 60
Remote control



Pneumatic coupler



Master jet

